

Fairfield Audio

FA240B

70V 240 Watt Amplifier




FA240B Features:

- 240W 70V/100V, 4/8/16 Ohm speaker outputs
- 3 Mic Inputs: 1/4" MIC1, XLR Mic2/Mic3 with phantom power switch
- Two RCA Dual Aux inputs, MIC2/MIC3 may be switched to 1/4" Line Inputs
- Independent volume control per source
- EMC emergency input
- Line Level Dual RCA Output
- MIC1 highest priority Variable Mute
- Built in Rack Wings (Front and Rear)


FA240B Specifications:

Rated Output	240W
Power Consumption	400W
Mic Inputs	5mv/600 Ohms, Balanced/Unbalanced
Phantom Power	Switch selectable 48V
Aux Inputs	250mV/15K Ohms, Unbalanced
Speakers Outputs	4 ~ 16 Ohms, 70V/100V
Frequency Response	50Hz ~15KHz
S/N Ratio	MIC1,2,3: >66dB; AUX 1,2:85dB
Muting Function	Mic 1 variable override other input signals, EMC mutes all except Mic1
Controls	Mic1-3, Aux 1-2 Individual gain controls, bass, treble, power switch
Power Requirements	110v-120v 60Hz~220V+/-10%/50Hz
Finish	Panel, Aluminum, Black; Case, Steel, Black
Dimensions	19.06 w x17 d x5.25 h In (484x435x132 mm)
Rack mount size	3U
Weight	41 lbs. (18.5 kg)
Accessories	Power cord, Manual


FA240B Front Panel:

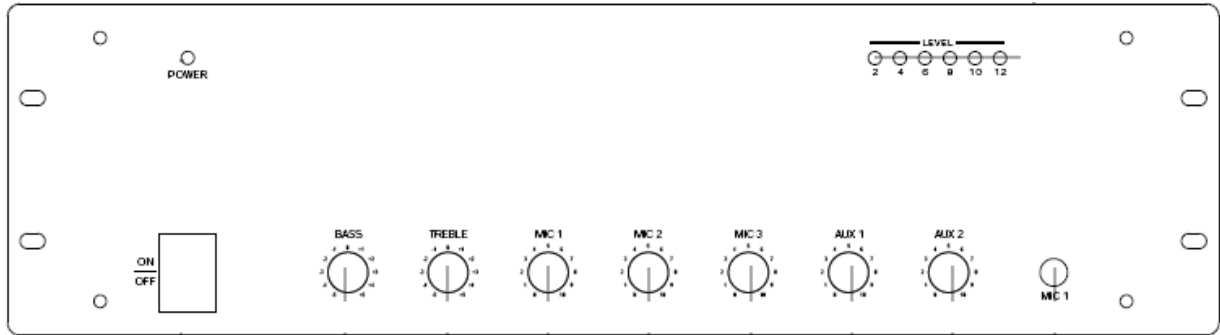

FA240B Rear Panel:

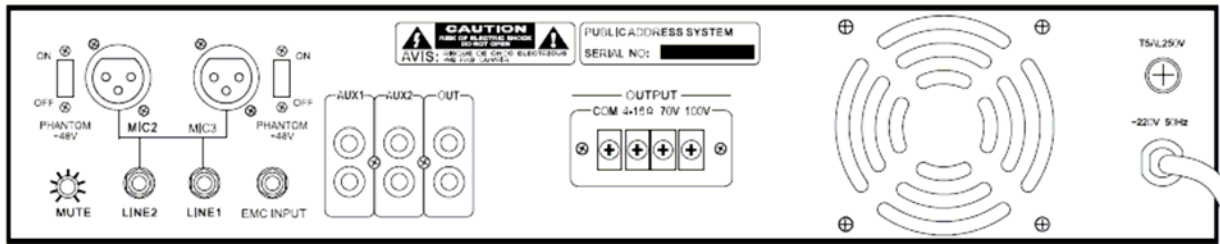

FA240B Configuration:

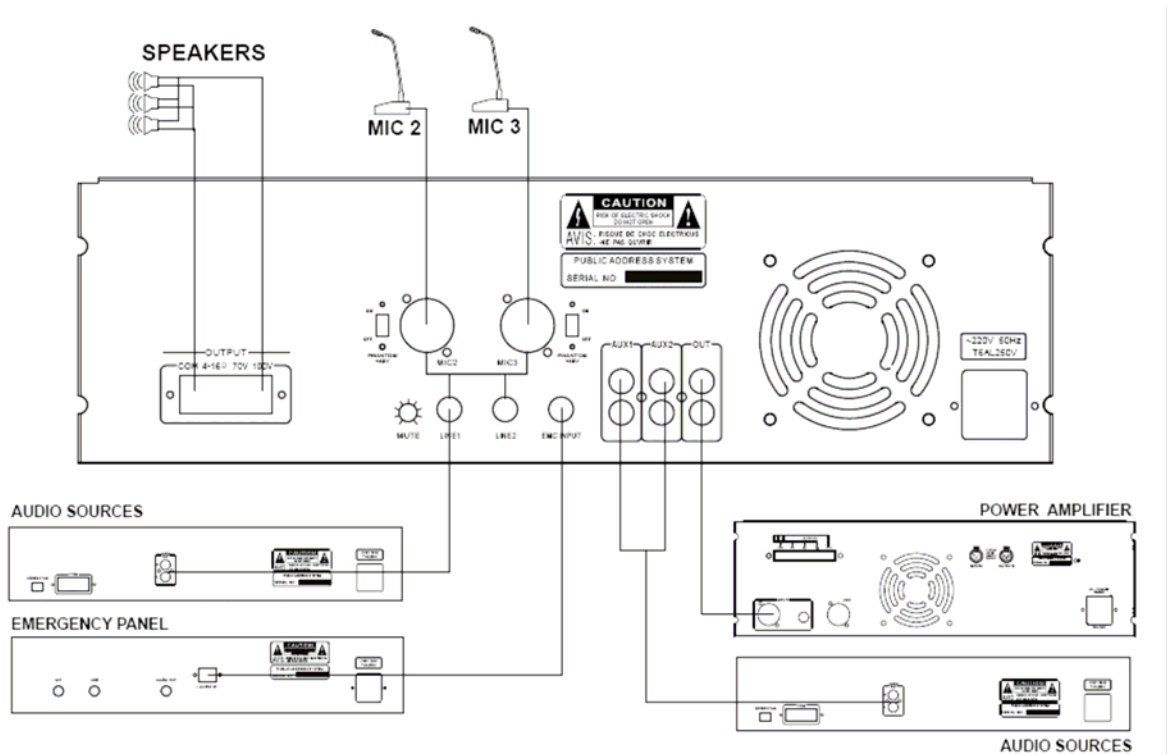

Fairfield Audio 2008
 For U.S. Sales Contact AVGUY.com
 808 McGlincy Ave, Campbell, CA 95008
 Tel 1-866-462-8489 Fax 408-371-5926
 Email: sales@avguy.com